
# NERI

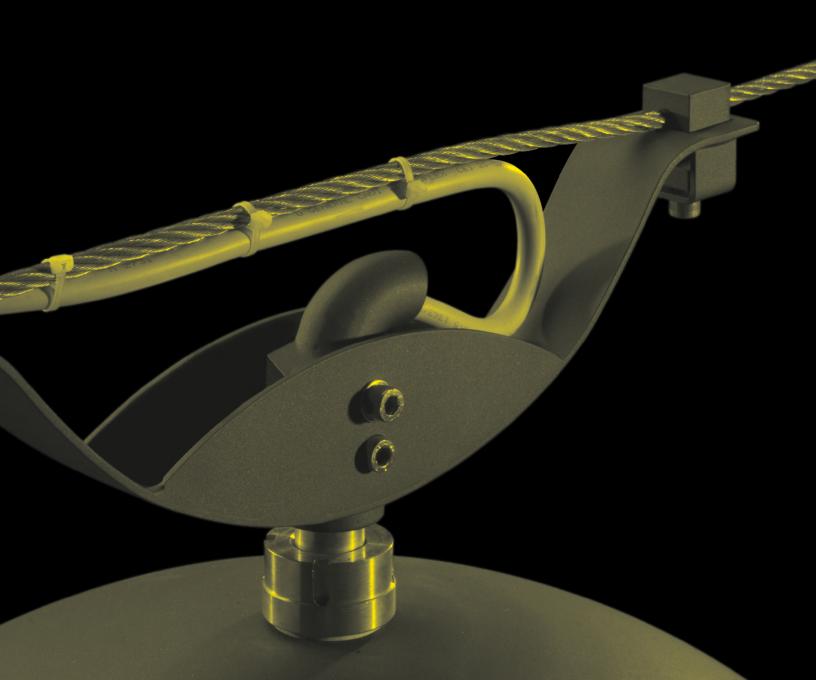

#### **CATENARY SOLUTIONS**

The Catenary Solutions series now allows nearly every Neri lantern, both Contemporary and Heritage, to be installed on standard cable in any application. Choose from three brackets: simple cable bracket for use on slacked or straight cable, angle-mount bracket offering slope adjustment up to 45 degrees, and a decorative slide-mount bracket. The Catenary Solutions work on standard 3/8" to ½" tension cable and have a water-protected entry and exit path for standard outdoor-rated SJ wiring. Use Catenary Solutions for an ethereal element on your next project.

Materials. The brackets are manufactured in hot-galvanized steel (UNI EN ISO 1461).

Finishes. The standard color is Neri grey; created with a color formula designed to replicate the characteristic tone of cast iron. All materials are further treated with a highly eco-friendly, water-based paint process. Salt spray and UV Exposure testing of over 1500 hours is conducted to the most rigorous standards.



#### Top right Milan, Italy

Neri Catenary Solutions using Light Nova fixture for public space application.

#### Bottom left Verona, Italy

Neri Catenary Solutions using Light 34 fixture for area lighting application.

#### **Bottom right** Ravenna, Italy

Neri Catenary Solutions using Light 34 fixture for roadway application.











#### MOUNTING BRACKETS

#### Simple cable bracket Model 9525.135



#### **Applications**

- Short cable lengths (<25'/8 m)
- Smaller fixtures on long lengths

#### Dimensions and weight

- Length 1.625" (4 cm)
- Height 4.75" (12 cm)
- Weight 1.1 lbs (0.5 kg)
- EPA =  $0.06 \text{ sqf} (0.005 \text{ m}^2)$

#### **Specifications**

- Bracket designed for use with 3/8" to 1/2" diameter steel cables
- Clamp locks in place with stainless steel M8 bolts
- For any Neri suspended lantern with 3/4" BSPP/GAS threaded connection
- Channel for Electric cable inverted to prevent water ingress

## **Angle-mount bracket** Model 9525.135.004



#### **Applications**

- Short cable lengths (<25'/8 m)
- Smaller fixtures on long lengths
- Sloped cable


#### Dimensions and weight

- Length 5.5" (14 cm)
- Height 8.25" (21 cm)
- Weight 2.2 lbs (1 kg)
- EPA =  $0.2 \text{ sqf } (0.018 \text{ m}^2)$

#### Specifications

- Bracket designed for use with 3/8" to 1/2" diameter steel cables
- Sloped position locks in place with (4) stainless steel M6 screws
- Clamp locks in place with stainless steel M8 bolts
- For any Neri suspended lantern with 3/4" BSPP/GAS threaded connection
- Channel for Electric cable inverted to prevent water ingress

#### Decorative slide-mount bracket Model 4006.330.003



#### **Applications**

- Long cable lengths (>25'/8 m)
- Windy areas
- Sloped cable


#### Dimensions and weight


- Length 17.5" (44,5 cm)
- Height 5.5" (14 cm)
- Width 2.0" (5 cm)
- Weight 4.84 lbs (2.2 Kg)
- EPA =  $0.15 \text{ sqf} (0.014\text{m}^2)$

#### **Specifications**

- Bracket designed for use with 3/8" to 1/2" diameter steel
- Position locks in place with quick-coupling system using two sliding clamps and stainless steel M8 bolts
- Fixture kept stabilized through tilt control system oscillating on stainless steel pins in the central element
- For any Neri suspended lantern with 3/4" BSPP/GAS threaded connection via quick-fastening system composed of a threaded brass ring nut and safety dowel
- Channel for Electric cable inverted to prevent water ingress

### LIGHTING FIXTURES

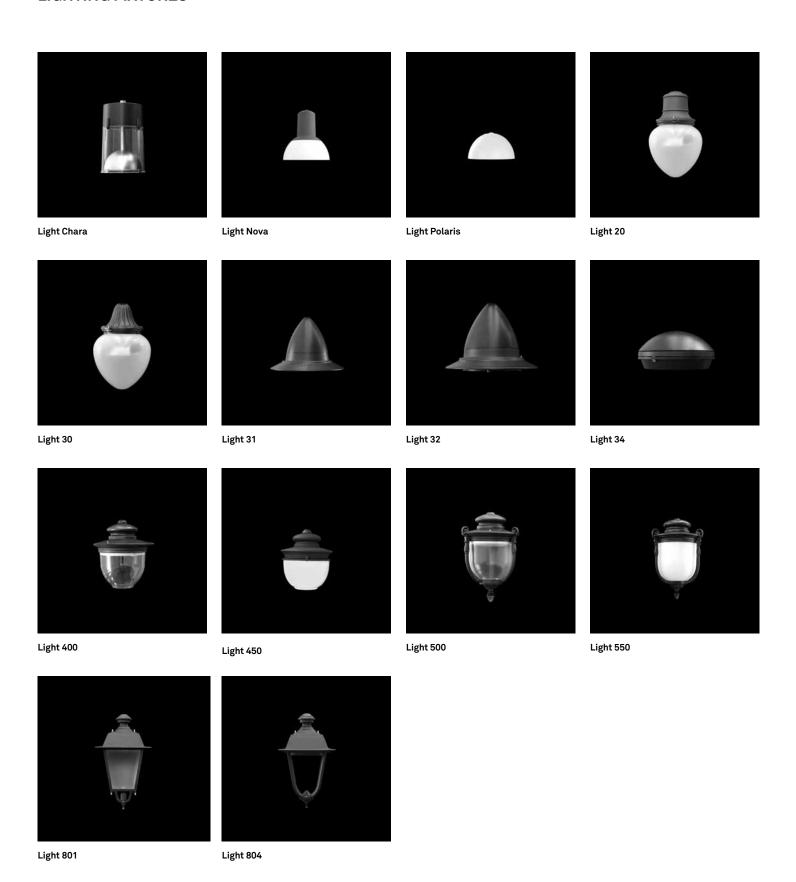

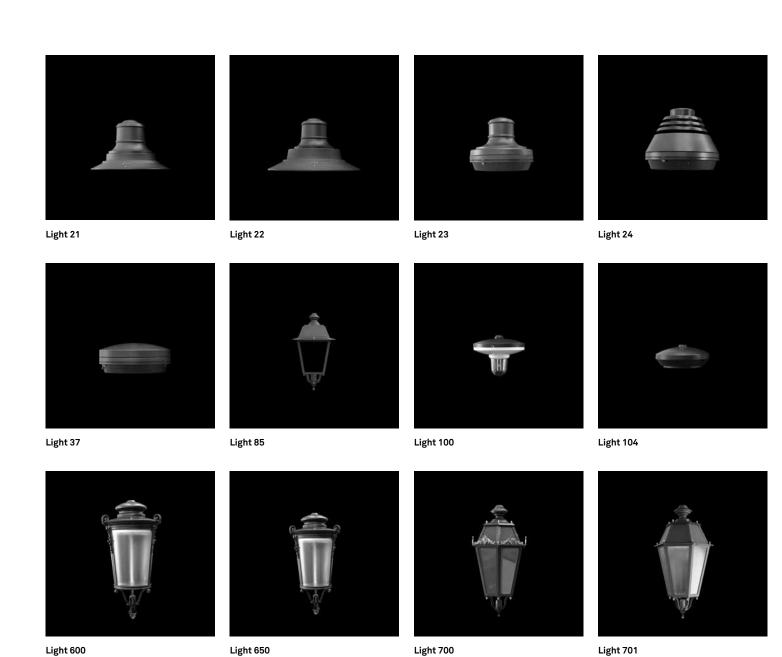

6 Neri North America · Catenary Solutions Series 7

#### NERI NORTH AMERICA INC.

1835NW 112th Avenue Suite 176 Miami, FL 33172, USA T +1 786 315 4367 F +1 786 693 7763

#### NERI S.p.A.

S.S. Emilia 1622 47020 Longiano (FC) · Italy T +39 0547 652111 F +39 0547 54074 www.neri.biz

#### NERI LIGHTING INDIA PVT. LTD.

(Subsidiary of Neri S.p.A. – Italy) 181 Evoma 14 Bhattaralli · K R Puram Bengaluru · 560 066 M +91 97 4112 9203 T +91 80 3061 3658

#### Neri Branch office

#### DUBAI

NERI S.p.A. (DMCC Branch) 29-13 Reef Tower Cluster O JLT - Jumeirah Lake Towers P.O. Box: 5003348 · Dubai · UAE T +971 4 448 7246 F +971 4 448 7112 M +971 50 650 7185