

Regulations of reference
NTC 2008 DM 14/01/2008

Components

The columns (A1 and A2) are made of cast iron castings. The lower column (A2) is octagonal with a base plinth and is inserted in the upper column (A1), which is decorated with twenty grooves, topped with a Corinthian capital. Each column has a flange (diameter: 284mm [11 1/4"]) with three holes (diameter: 20mm [3/4"]) for fixing to the ground with anchor bolts.

The octagonal columns (B) are made of cast iron (key: 75mm [3"]) with an corner bracket.

The cast iron frieze (C) is made of a single cast and comprises an arch at the bottom decorated with leaves and lilies and, above, five squares internally decorated with four symmetrically placed leaves.

The cover (D) is made from hot-dip galvanised steel beams that support a copper-coloured fibreglass cover and an internal false ceiling made from wooden matchboarding (with an overhead 12mm [2/4"]-thick layer of expanded polyethylene) which continues to the outside of the gazebo throughout the protrusion of the cantilever roof.

The cantilever roof is supported by cast iron beams and brackets (E). The brackets are interposed between the squares of the panels (four brackets per panel).

The gutter is made of an appropriately-shaped hot-dip galvanised steel sheet, with copper outriggers, visibly covered by a decorated aluminium fascia (F).

The skylight is made from hot-dip galvanised steel beams that support a copper-plated fibreglass cover and an internal false ceiling (insulated with a 12mm [2/4"]-thick layer of expanded polyethylene and 30mm [1 1/4"]-thick expanded polystyrene panel) in wooden matchboarding. The roof, like the cantilever roof, is equipped with a gutter with the same features.

The windows (alternately fixed, with a lift-up opening) are made from a hot-dip galvanised steel frame, complete with glass.

The two tops (G) are made of cast aluminium with a pointed tip, decorated at the bottom with leaves and placed on top of the cover.

The light points (H) are made of cast aluminium brackets to be fixed to the columns (B), decorated with a globe light (diameter: 200mm [7 3/4"]) in opal white PMMA with bulb holder.

The gazebo is supplied with two central globe lights (diameter: 350mm [13 3/4"]) in opal white PMMA, with a bulb holder.

Materials

The standard colours are:
- Cast iron UNI EN 1561

SMALL GAZEBOS
ARTICLE: 3013.002.300
TECHNICAL DESCRIPTION

Decorated small gazebo
Rectangular plan
Double hipped roof
Gazebo with arches

- Cast aluminium UNI EN 1706
- S235J steel UNI EN 10219-1
See the specific descriptions on the painting cycles of the materials that make up the product.

Finishes

The standard colours are:
- Neri Grey
- White RAL 9010
Other colours are available upon request.

Weight

Standard indications

Installation

To place in operation, it is necessary to prepare a perfectly level brickwork base.


The electronic, hydraulic and flooring systems are not included.

Warranty

Standard

3013	002	300
Gazebo plan	Roof type	Column height

Rectangular plan



Usable area

28.7m² [309 sq ft]


Covered area

44.3m² [477 sq ft]


Modules

14

Double hipped roof

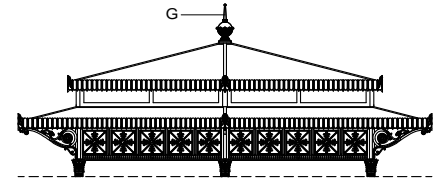

Gazebo with arches

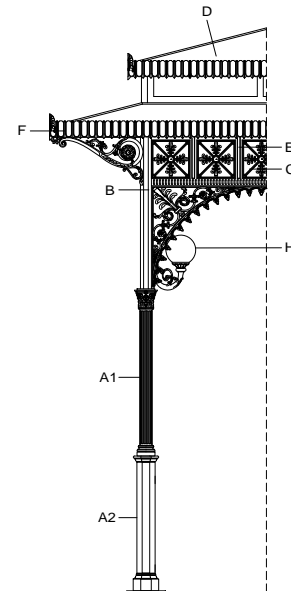

SMALL GAZEBOS
ARTICLE: 3013.002.300
PLAN
SCALE 1:50

Decorated small gazebo
Rectangular plan
Double hipped roof
Gazebo with arches

3013


Gazebo plan

002

Roof type

300

Column height

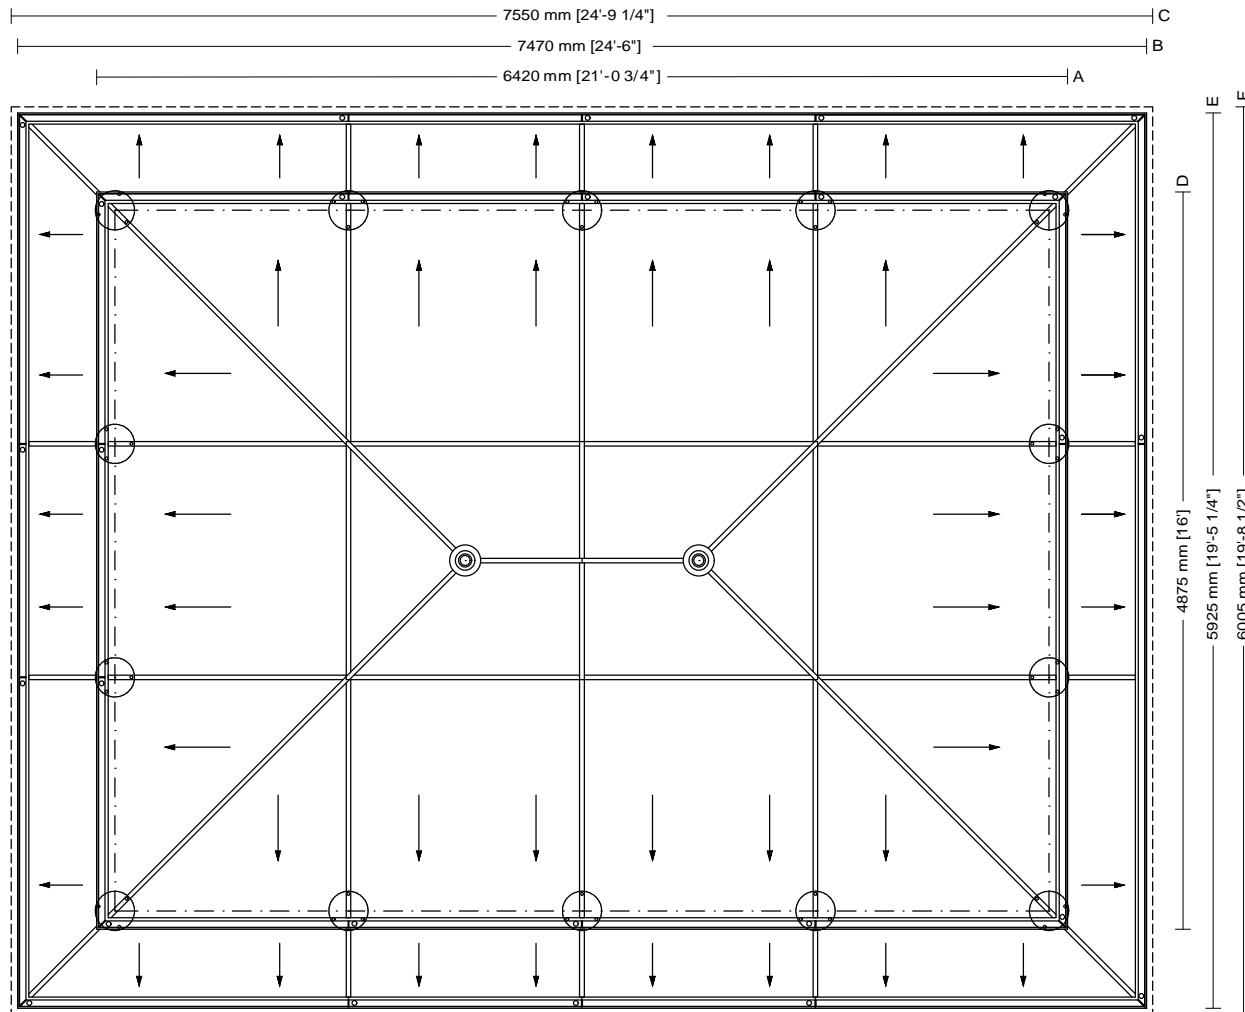

Usable area

28.7m² [309 sq ft]

Covered area

44.3m² [477 sq ft]

Modules

14


Drawing key

- A Column axis
- B Foundation base
- C Roofing
- D Column axis
- E Foundation base
- F Roofing

SMALL GAZEBOS
ARTICLE: 3013.002.300
ELEVATION
SCALE 1:50

Decorated small gazebo
Rectangular plan
Double hipped roof
Gazebo with arches

3013	002	300
Gazebo plan	Roof type	Column height

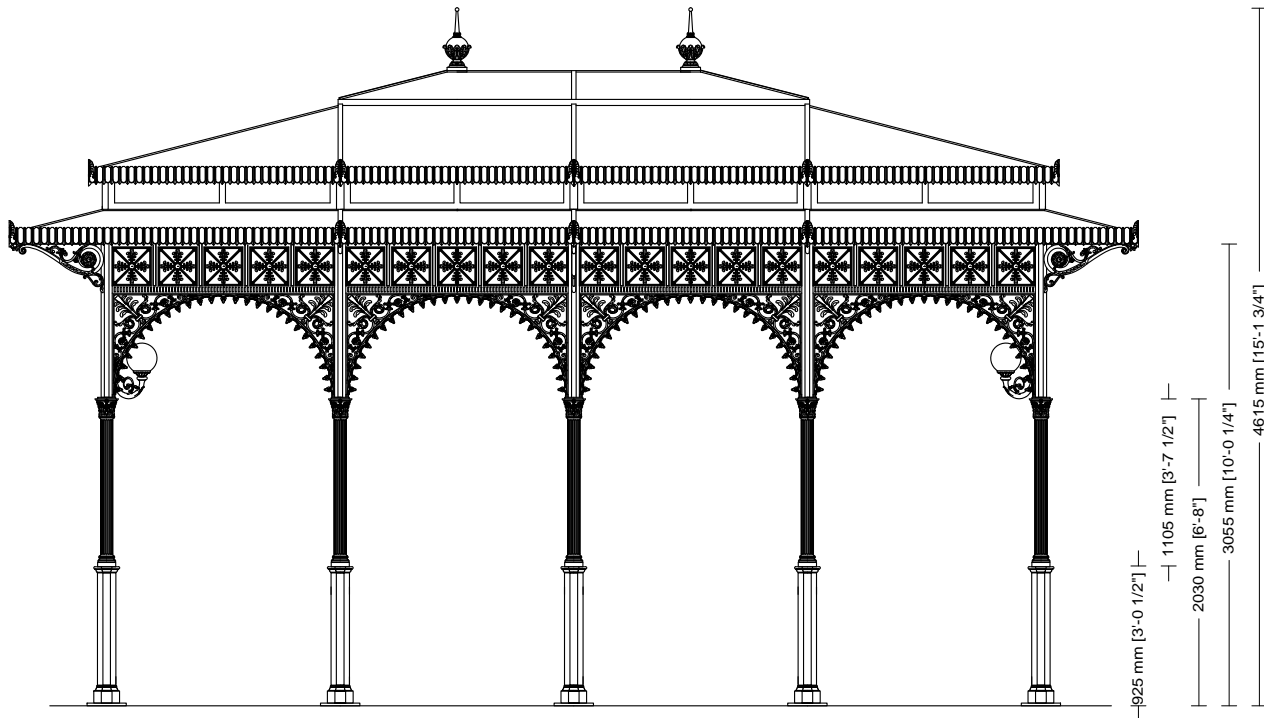

SMALL GAZEBOS
ARTICLE: 3013.002.300
SECTION
SCALE 1:50

Decorated small gazebo
Rectangular plan
Double hipped roof
Gazebo with arches

3013	002	300
Gazebo plan	Roof type	Column height

